

NEW

Origin : Made in Japan
Quotation Month : January 2021

Anti-Noise Brake Grease

It is Noise reduction Silicone Grease.
It is special blend that outstanding of
Heat-resistant and weatherability.
It helps to keep low noise occurrence.



If you have query, please do not hesitate to ask us.

 MK KASHIYAMA CORP.

MK KASHIYAMA Anti-Noise Brake Grease GT100-MK

Has Long-lasting effects !

GT100-MK is a noise control silicone grease developed by MK KASHIYAMA CORP who have been professionally manufacturing brake pads and shoes for over 50 years.



GT100-MK

Evaporation of grease oils : 3.8%
maintaining the lubricating function.



Brand A

Evaporation of grease oils : 10.2%
hardening of the surface and cracked.



Brand B

Evaporation of grease oils : 5.6%
changed to a rubber like hardness.



Brand C (for motor sports)


Evaporation of grease oils : 6.4%
hardened totally.

This special blend of grease has an outstanding heat-resistance and weatherability compared with other products.

Please use with MK KASHIYAMA Brake Pad and Shoe !

Shutout Brake noise !

Almost completely dampens out noises occurring over 5.5kHz 70dB when carrying out a brake test using a dynamometer tester.

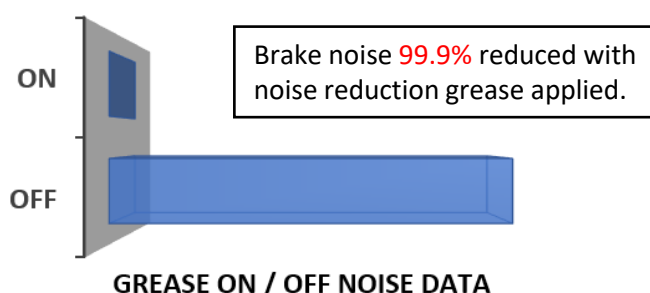

Comparison of the moisture evaporation with hot air circulating in a constant temperature bath of 250°C after 7days.

Apply correctly to bring out the 100% effectiveness of the grease!


Please apply appropriate amount of grease at the time of installing brake pads or brake shoes, as the instructions below.

WHERE TO USE



Sliding part of the brake pad and caliper carrier.

Contact area of brake shim (If the brake pad has shim) and caliper carrier or caliper piston.

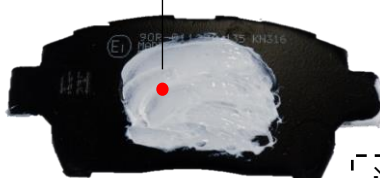

※Contact area of brake pad and brake shim.



Contact area of brake shoe rim and wheel cylinder.

Pressure points of brake shoe rim and back plate.

※Contact area of brake shoe rim and back plate.
※Slide part or contact area of metal etc.

ATTENTION

Please do not adhere grease on the friction lining surfaces.



※It is recommended, to apply grease upon every inspection.

